


PROPOČTY PODLE THU

Objekt	Název objektu	M. J	Poč./M. J	Kč/M. J	Kč	Pracovní doba [hod]	Počet pracovníků	t [Nh/MJ]	t [dnů]	Týdny	Doba provádění (týdny)	2019							
												2	3	4	5	6	7	8	9
SO 01	příprava území (vč. vykácení dřevin)	m²	3 952,16	154,0	608 632,64 Kč	8	8	0,17	10,50	2,10	1. - 3.	608 632							
SO 02	objekt A - administrativní budova (vč. dokončovacích prací)	m³	63 462,87	7 095,0	450 269 083,94 Kč	8	27	3,4	998,95	199,79	3. - 203.		9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193
SO 03	STL plynovodní přípojka	m	6,07	3 531,0	21 433,17 Kč	8	4	1,26	0,24	0,05	86.								
SO 04	kabelová přípojka VN	m	11,10	1 974,0	21 911,40 Kč	8	4	1,14	0,40	0,08	15.				21 911				
SO 05	přeložka elektro NN	m	103,30	1 040,0	107 432,00 Kč	8	6	0,97	2,09	0,42	3.	107 432							
SO 06	vodovodní přípojka	m	24,30	4 850,0	117 855,00 Kč	8	6	1,8	0,91	0,18	3.	117 855							
SO 07	přípojka jednotné kanalizace	m	24,86	7 870,0	195 648,20 Kč	8	6	3,46	1,79	0,36	10.			195 648					
SO 08	sadové a terénní úpravy	m²	1 887,00	859,5	1 621 876,50 Kč	8	10	1,3	30,66	6,13	201. - 206.								
SO 09	chodníky, zpevněné plochy, úprava komunikací	m²	2 113,90	1 600,0	3 382 240,00 Kč	8	15	0,68	11,98	2,40	197. - 199.								
SO 10	oplocení	m	328,16	5 230,0	1 716 276,80 Kč	8	6	3,71	25,36	5,07	206. - 210.								
SO 11	veřejné osvětlení	m	56,32	2 084,0	117 370,88 Kč	8	6	1,13	1,33	0,27	193.								
SO 12	retenční nádrž	m³	174,60	5 430,0	948 078,00 Kč	8	6	2,5	9,09	1,82	11. - 12.			948 078					
SP 01	výtahy	ks	6,00	1 200 000,0	7 200 000,00 Kč	10	8	25	35,00	7,00	175. - 181.								
celková cena stavby					466 327 838,53 Kč														
Měsíční náklady [Kč]:												833 919	9 580 193	10 723 919	9 602 104	9 580 193	9 580 193	9 580 193	9 580 193
Roční náklady [Kč]:												97 801 486							
Celkové náklady [Kč]:																			



			2020												2021					
10	11	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6
9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193
												21 433								
9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 601 626	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193	9 580 193
			114 983 749												114 962 316					
															466 327 839					

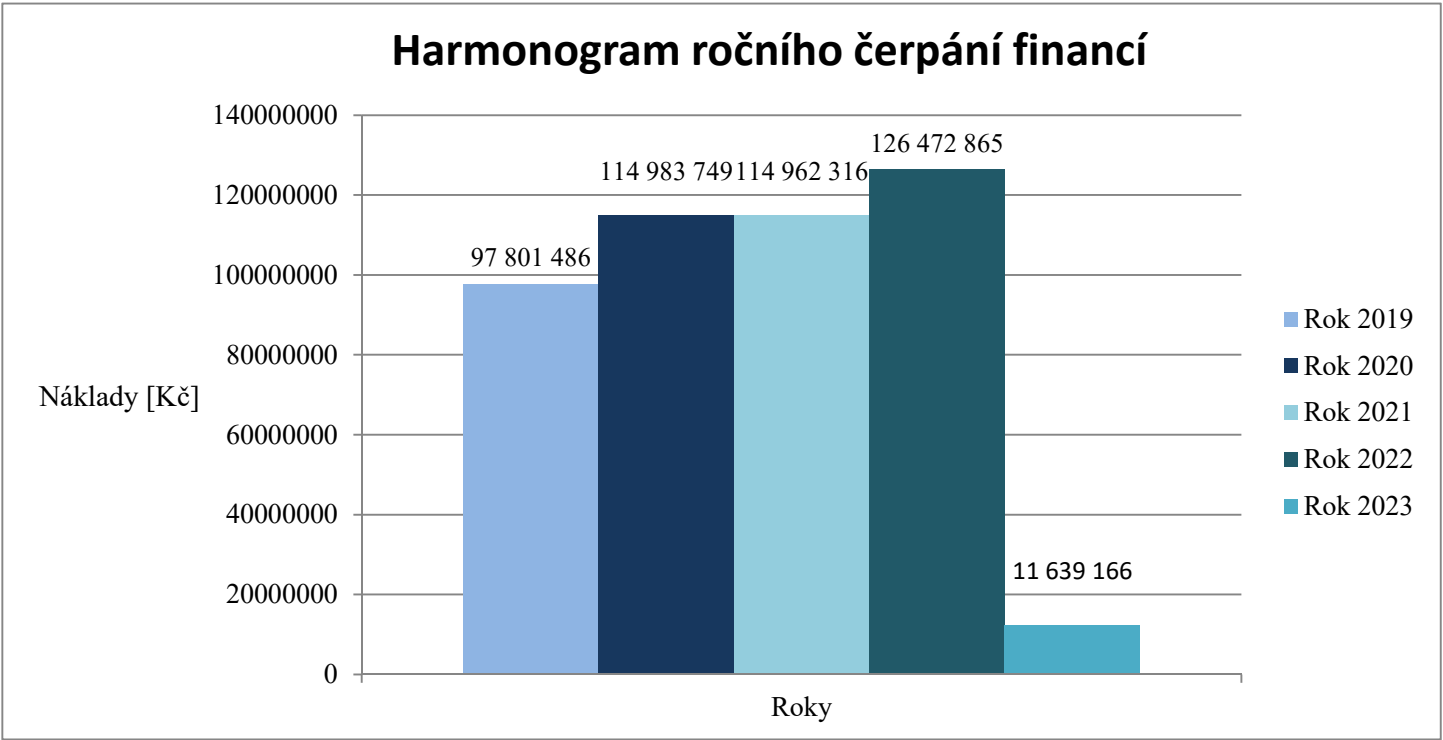