


1:10 AXONOMETRIC VIEW OF RAILING CONNECTION

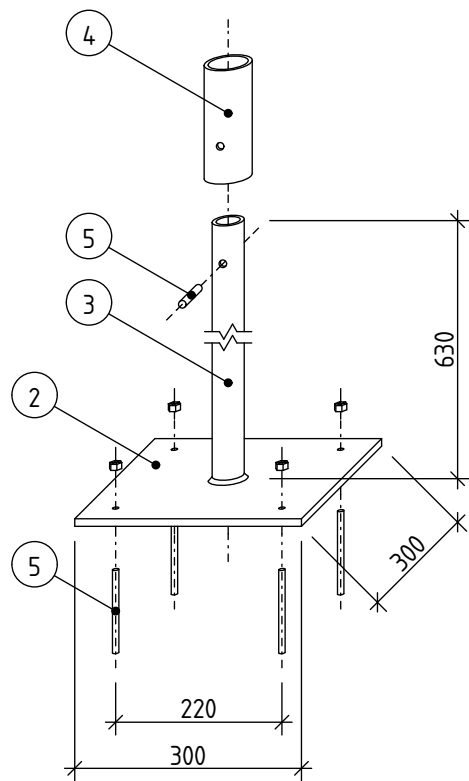

5	SECURING PIN	STEEL SCREW M10, l. 75 mm
4	RAILING STAND	STEEL PIPE, d. 60 mm, l. 1800 mm th. 5 mm PUT ON THE FIXING STUD AND SECURED BY PIN
3	STRUT	STEEL PIPE, d. 40 mm, l. 630 mm, th. 5 mm, WELDED TO THE FIXING PLATE
2	FIXING PLATE	STEEL PLATE 300x300 mm, th. 5 mm
1	THREADED ROD	STEEL, M8, L. 120 mm, WITH WASHER AND NUT CHEMICAL ANCHOR

NOTE: THE STRUT IS COVERED BY ELASTIC BITUMEN
WATERPROOF LAYER