


# INSTALLATION SHAFT WA6

SC 1:5

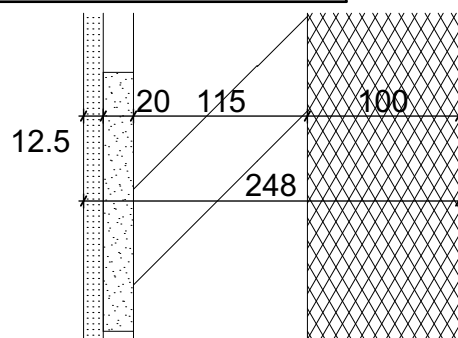

## COMPOSITION OF INSTAL. SHAFT WALL HELUZ 11.5

N	FUNCTION	MATERIAL SPECIFICATION	STABILIZATION	THICKNESS
1	PAINT	ONE-COMPONENT, WATER-SOLUBLE PAINT DESIGNED FOR GYPSUM BOARDS internal dispersion paint with organic binders and limestone fillers, water vapour permeability 0.02 m	brush or spraying machine	-
2	FILLER	UNIVERSAL PASTE FILLER bending strength > 320N, fire reaction class A2-s1,d0	stainless steel trowel	-
3	GYPSUM BOARD	GYPSUM BOARD coefficient of thermal conductivity $\lambda_u$ 0.21W/m <sup>2</sup> *K, fire reaction class A2-s1,d0, diffusion resistance factor $\mu$ 6-10, longitudinal expansion factor in case of humidity change $5 \cdot 8 \cdot 10^{-6}$ , compressive strength 5.0 - 10.0 MPa	mechanically anchored	12.5
4	ADHESIVE BINDER	GYPSUM ADHESIVE BINDER adhesion min. 0.24 MPa, fire reaction class A1, curing time min. 12 hours	stainless steel trowel	20
5	PENETRATION	CONCENTRATED WATER DISPERSION concentrated aqueous dispersions of artificial resins based on acrylic resins with additives, consumption 100g/m <sup>2</sup> , dilution ratio 1:4, curing time circa 24 hours	roller, brush or spraying machine	-
6	PARTITION	PARTITION MASONRY BRICK monolayer, heat transfer coefficient U 1.42W/m <sup>2</sup> *K, coefficient of thermal conductivity $\lambda_u$ 0.259W/m <sup>2</sup> *K, fire reaction class A1, fire resistance EI 120 DP1, airborne noise Rw 45, diffusion resistance factor $\mu$ 5/10	-	115
7	GAP/ CARRYING	MINERAL WOOL INSULATION insulation with longitudinal fibre, coefficient of thermal conductivity $\lambda_u$ 0.036W/m <sup>2</sup> *K, fire reaction class A1, diffusion resistance factor $\mu$ 1  BEARING SYSTEM metal profile structure	-  mechanically anchored	100